



Saving transportation space and
ocean freight



PRODUCT BROCHURE

Expandable Container House

Tianjin Nanxiang
Steel Strip Processing Co., Ltd.



With shower and toilet, dry and wet separation
wooden floor with dampproof, more comfortable



Big space



Easy installation




High comfort



Come with
accessories

4 STEPS = 1 HOUR INSTALL = 1 HOUSE

I N S T A L L A T I O N

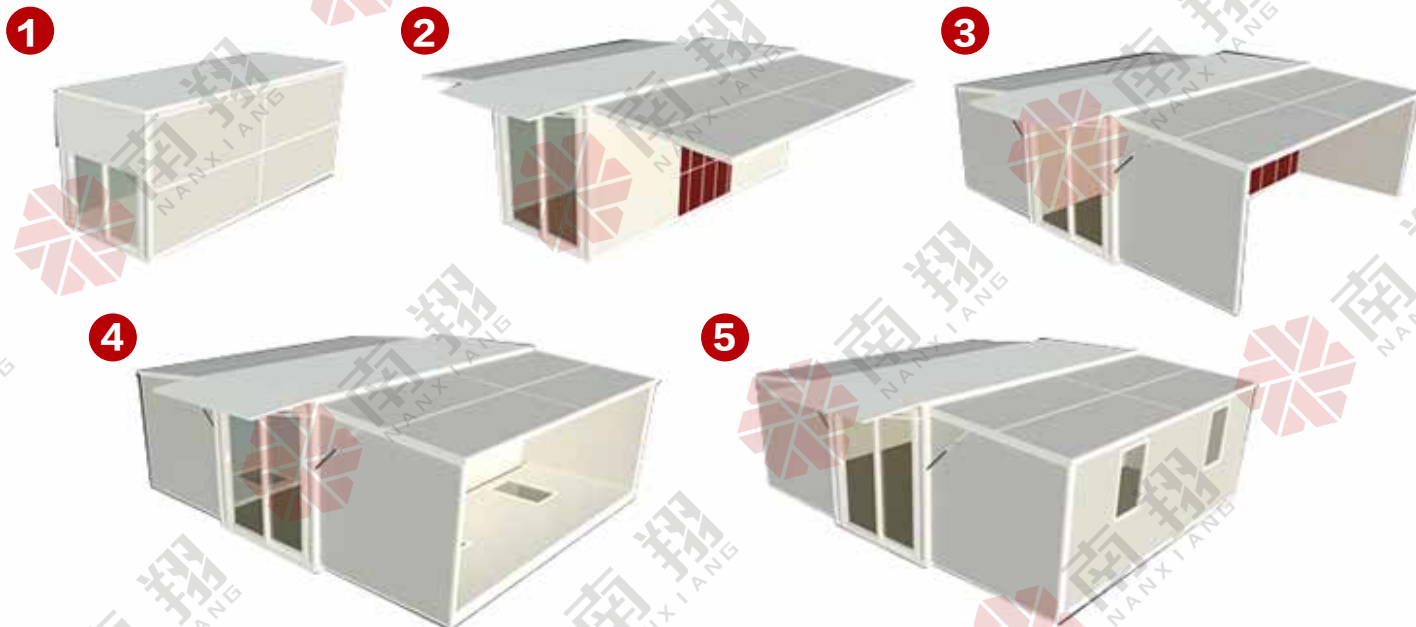

TYPE A



- Opening size : 5.8Mx4.394Mx2.5M
- Closing size : 5.8Mx0.7Mx2.5M
- Total area : 27.5m²
- 1X40HQ can load 6 units

TYPE B

- Opening size : 5.8Mx6.3Mx2.5M
- Closing size : 5.8Mx2.2Mx2.5M
- Total area : 36.54m²
- 1X40HQ can load 2 units



20FT LAYOUT



One Living room
One Bedroom
One Restroom



One Living room
One Bedroom
One Restroom



One Living room
Two Bedrooms
One Restroom





One Living room
Three Bedrooms
One Restroom



One Living room
Three Bedrooms
One Restroom



Four Bedrooms
One Restroom

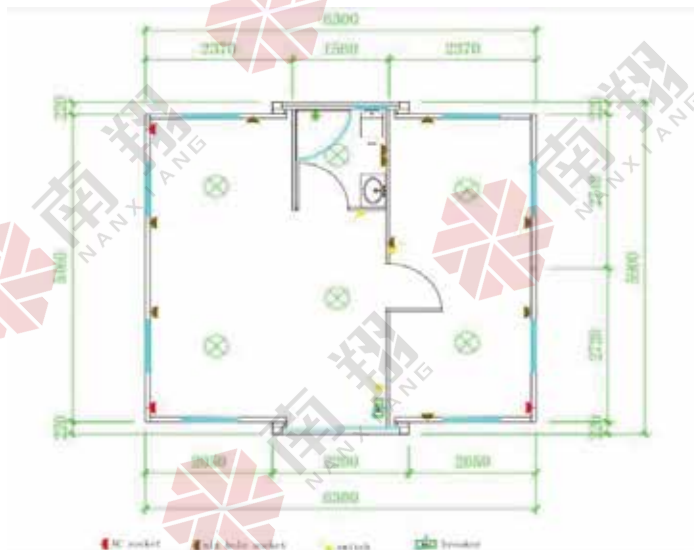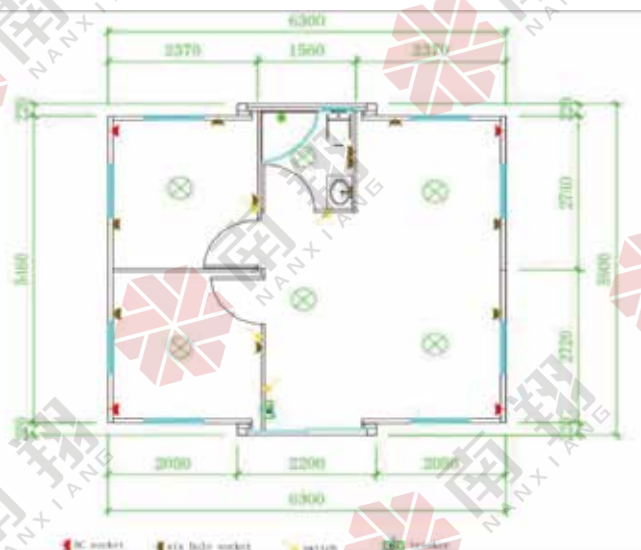





40FT LAYOUT



One Living room
Six Bedrooms
One Bathroom



One Living room
Five Bedrooms
Two Bathroom

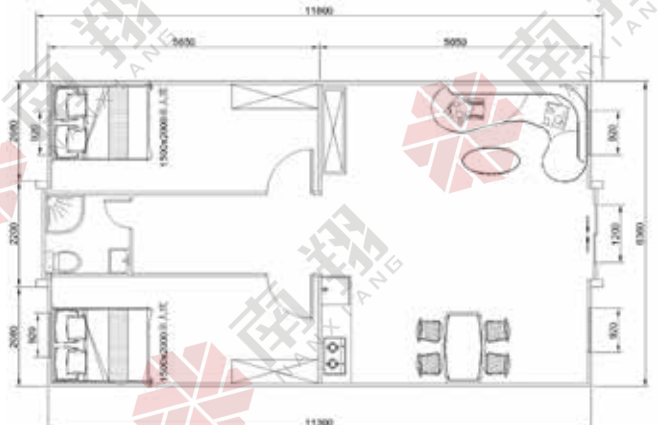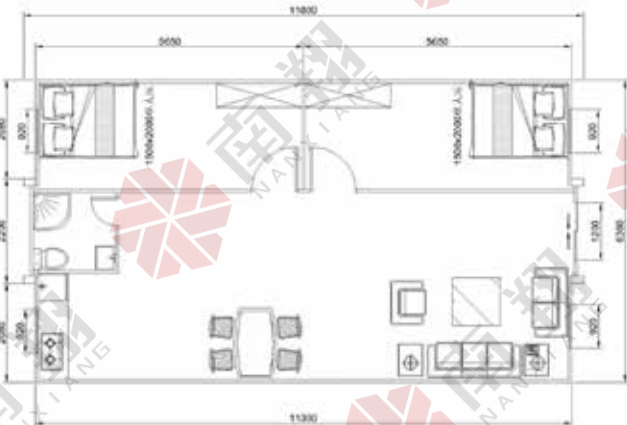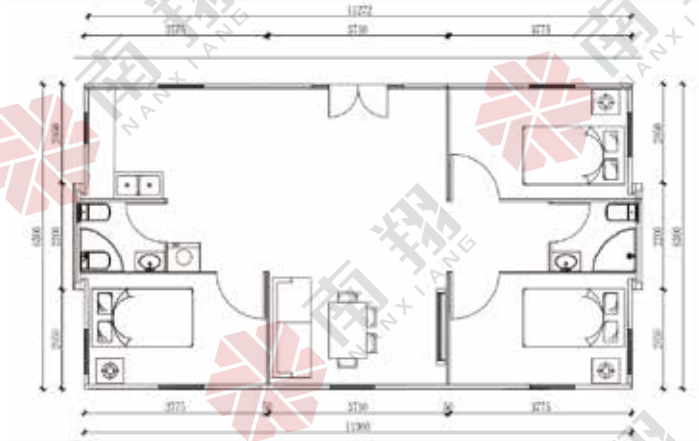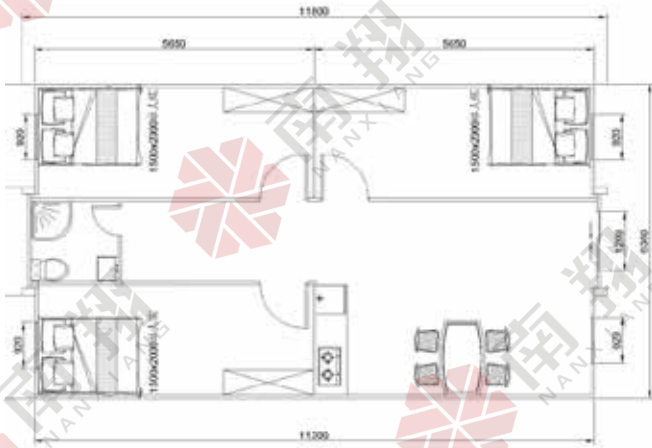

ITEM 1

Two bedroom + One bathroom + One kitchen 20FT layout





ITEM 2

Two bedroom + One bathroom + One kitchen 20FT layout




ITEM 3 Three bedroom + One bathroom + One kitchen 40FT layout



OUT SIDE WALL COLOR




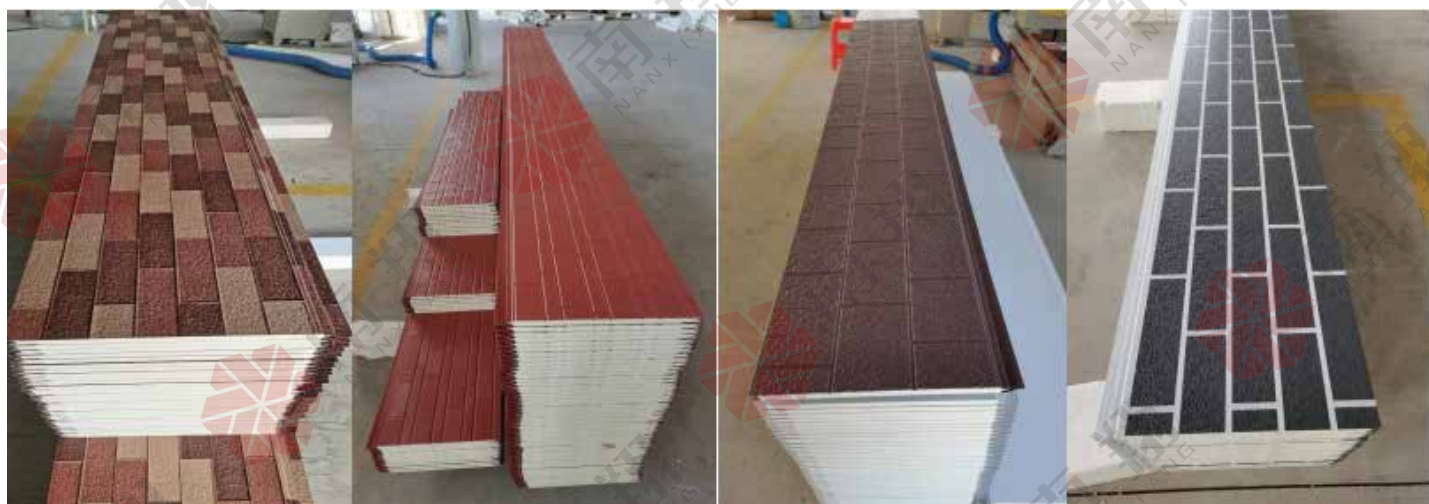

BATHROOM



FLOOR STYLE

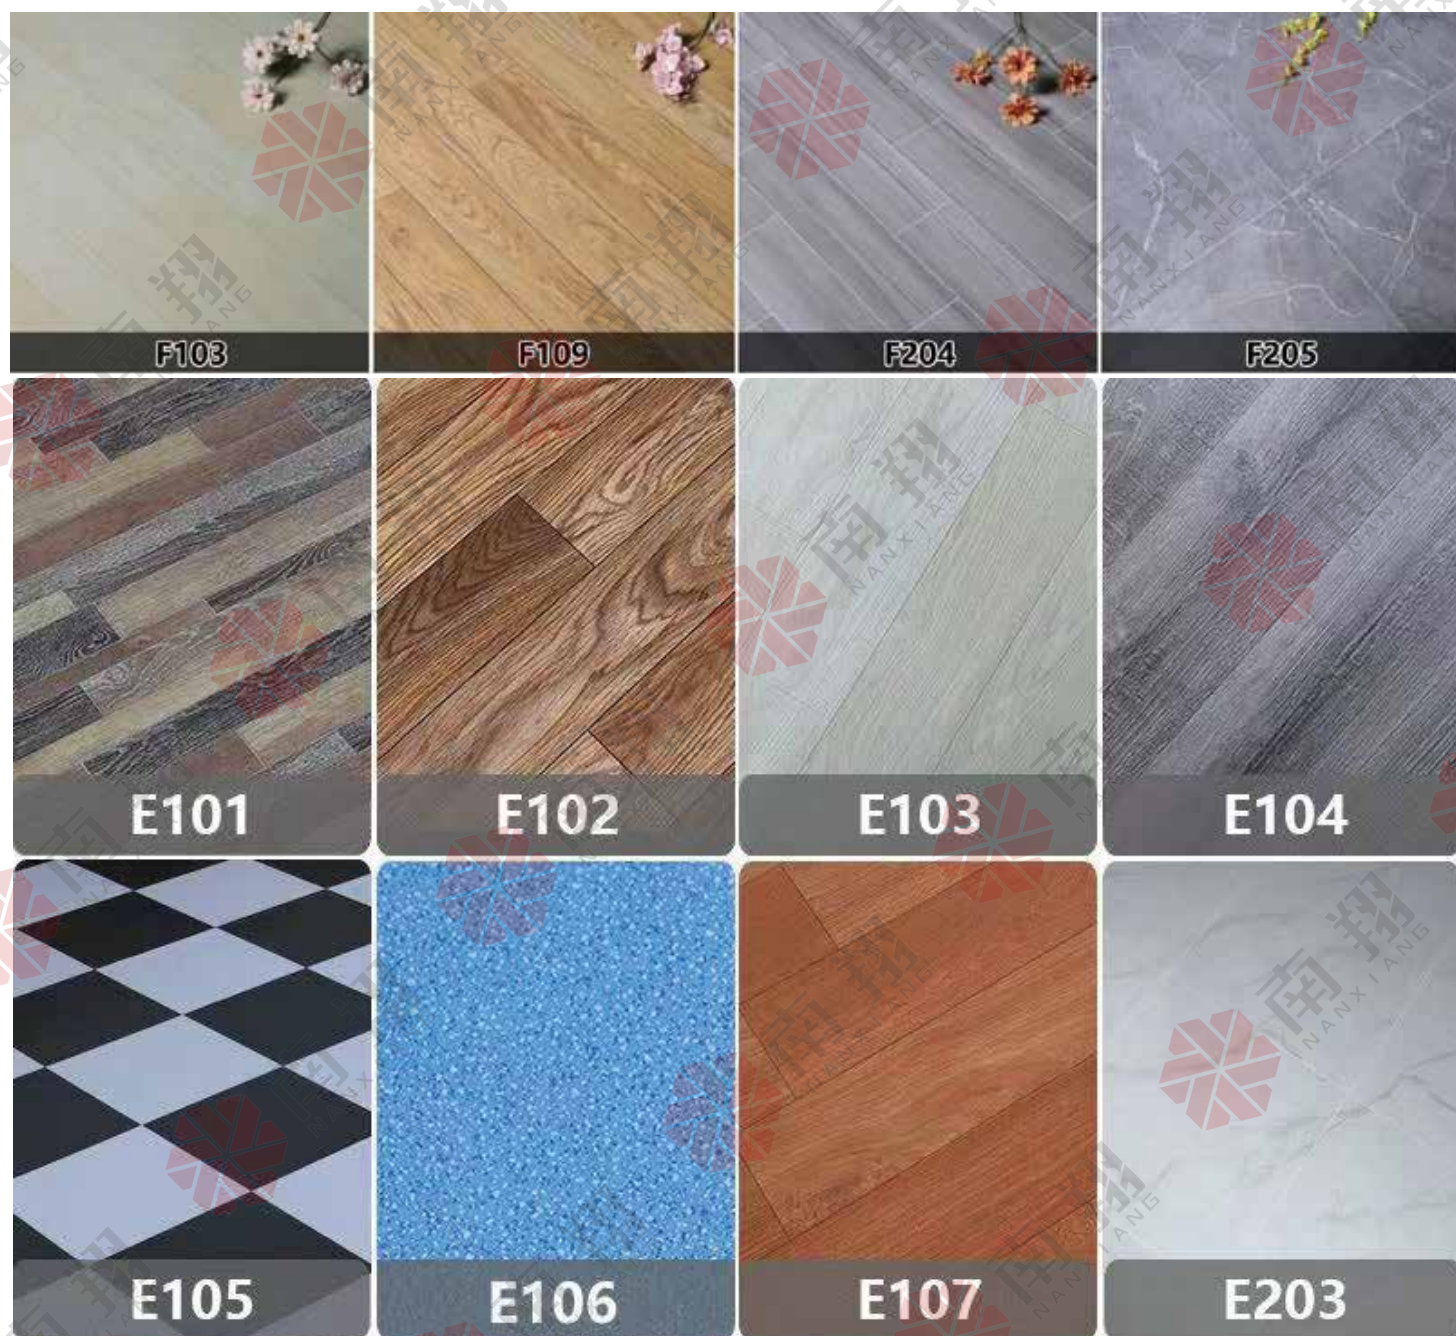

EXPANDABLE CONTAINER HOUSE

The specifications of the 20ft expandable container house

Name	Specification	Size
Basic Features	External dimensions(mm)	W6300*L5900*H2480
	Internal dimensions(mm)	W6140*L5640*H2260
	Folding state(mm)	W2200*L5900*H2480
	Total weight (kg)	2500
Frame Structure	Roof beam	T2.5mmQ235B
	Insole beam	T2.5mmQ235B
	End side beam	T2.5mmQ235B
	Center column	T2.5mmQ235B
	Side wall frame	T2.0mmQ235B
	Secondary frame	T2.0mmQ235B
	Hanging head	T4mmQ235B
	Folding hinge	13mm galvanized hinge
	Overall frame protective coating	Electrostatic spray/straight white plastic powder
	Top and bottom of middle cabinet	80*100*2.5mm square tube
Top of Box	Side cabinet top and bottom	40*60*2.0 mm square tube
	External top plate	T0.5mm galvanized sheet
	Internal ceiling	T0.35mm 831 type internal ceiling
Wallboard	Middle roof insulation	T65mm high strength EPS, steel plate or T65mm glass wool
	Side wall, front and rear wall panels	T65mm high strength EPS, steel plate or T65mm glass wool
	Internal partition	T65mm high strength EPS, steel plate or T65mm glass wool
	Internal toilet	1700*1500(can adjusted size)

EXPANDABLE CONTAINER HOUSE

Name	Specification	Size
Floor	Central part	Fireproof glass magnesium floor (15mm)
Electrical System	Electrical wiring, installation in strict accordance with moisture-proof specifications, all electrical products must meet CE certification. Connection circuit according to circuit engineering specifications, indoor: 2 LED lights, 2 ceiling lights, 5 single socket 3, single socket 1, 10 socket 3, air conditioning socket 1, 20A leakage protector. Voltage: 220V, 50HZ. can do American standard, European standard, Italian standard, Australian standard and other national standard sockets and voltages.	
Security Doors	1SET (can adjustable door size and quantity and position)	
Windows	8pieces (920*920mm)	
Service Life	1 years	
Fire rating	Rate A	
Seismic grade	Grade 8	
Wind resistance level	Level 10	

EXPANDABLE CONTAINER HOUSE

The specifications of the 40ft expandable container house

Name	Specification	Size
Basic Features	External dimensions(mm)	W6300*L11800*H2480
	Internal dimensions(mm)	W6140*L11460*H2260
	Folding state(mm)	W2200*L11800*H2480
	Total weight (kg)	5000
Frame Structure	Roof beam	T2.5mmQ235B
	Insole beam	T2.5mmQ235B
	End side beam	T2.5mmQ235B
	Center column	T2.5mmQ235B
	Side wall frame	T2.0mmQ235B
	Secondary frame	T2.0mmQ235B
	Hanging head	T4mmQ235B
	Folding hinge	13mm galvanized hinge
	Overall frame protective coating	Electrostatic spray/straight white plastic powder
	Top and bottom of middle cabinet	80*100*2.5mm square tube
	Side cabinet top and bottom	40*60*2.0 mm square tube
Top of Box	External top plate	T0.5mm galvanized sheet
	Internal ceiling	T0.35mm 831 type internal ceiling
Wallboard	Middle roof insulation	T65mm high strength EPS, steel plate or T65mm glass wool
	Side wall, front and rear wall panels	T65mm high strength EPS, steel plate or T65mm glass wool
	Internal partition	T65mm high strength EPS, steel plate or T65mm glass wool
	Internal toilet	1700*1500(can adjusted size)

EXPANDABLE CONTAINER HOUSE

Name	Specification	Size
Floor	Central part	Fireproof glass magnesium floor (15mm)
Electrical System	Electrical wiring, installation in strict accordance with moisture-proof specifications, all electrical products must meet CE certification. Connection circuit according to circuit engineering specifications, indoor: 2 LED lights, 2 ceiling lights, 5 single socket 3, single socket 1, 10 socket 3, air conditioning socket 1, 20A leakage protector Voltage: 220V,50HZ. can do American standard, European standard, Italian standard, Australian standard and other national standard sockets and voltages.	
Security Doors	1SET (can adjustable door size and quantity and position)	
Windows	10pieces (920*920mm)	
Service Life	1 years	
Fire rating	Rate A	
Seismic grade	Grade 8	
Wind resistance level	Level 10	

TRANSPORTATION



RAW MATERIAL



OUR CUSTOMER

We have customers from over 40 countries, also negotiate with clients in embassy about some big projects. The quality and after sales service are satisfied by clients.



FACTORY





南 翔
NANXIANG